REV	DESCRIPTION:	DATE
1.0	Change VLCD to 13.5V from 11.5V	

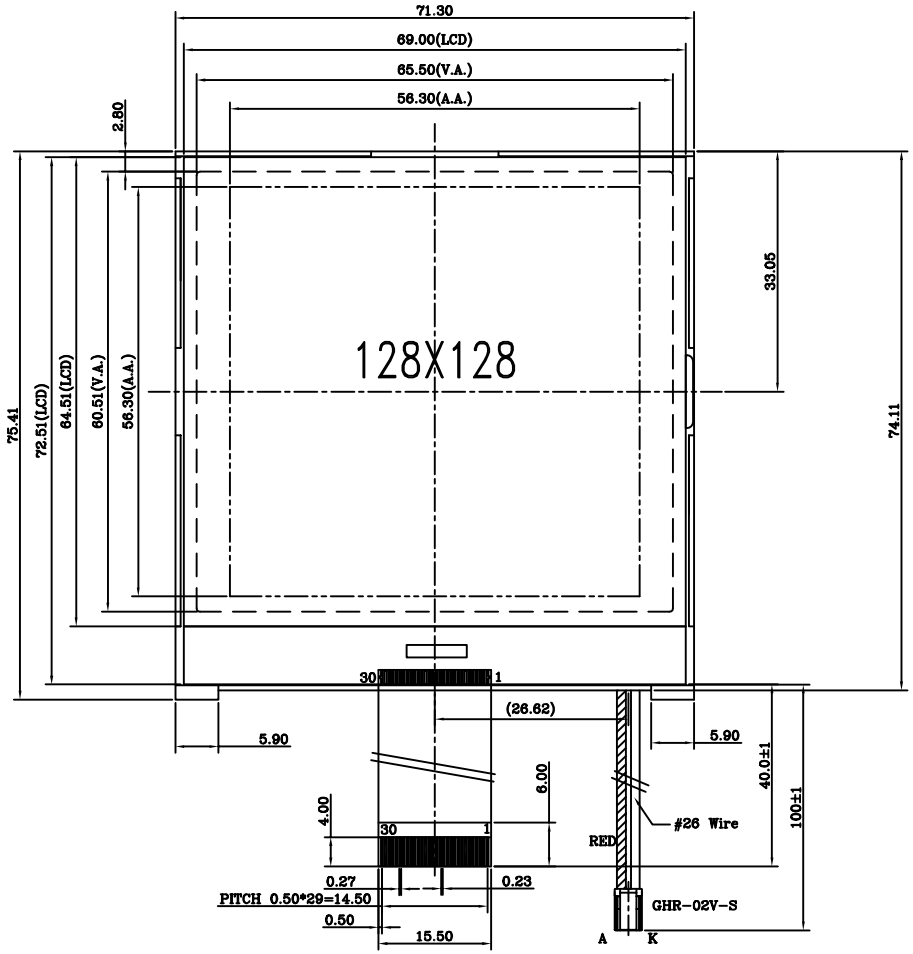

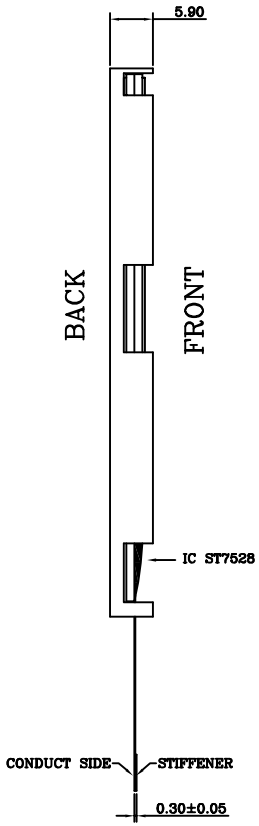



DOTS SCALE:1/10



COM & SEG LAYOUT

WHITE LED BACKLIGHT



PIN ASSIGNMENT

NO.	SIGNAL
1	PS0
2	PS1
3	PS2
4	CSB
5	RST
6	A0
7	RW-WR
8	E-RD
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	VDD
18	VDD
19	VSS
20	VSS
21	VOUT-OUT
22	VOUT-IN
23	V4
24	V3
25	V2
26	V1
27	V0
28	VR
29	INTRS
30	NC

Specification:

1). Driving: 1/128 Duty, 1/12 Bais, Vlcd: 13.5V ⚠
2). Viewing Direction: 6 O'clock
3). Display mode: STN/Positive/Transflective/Gray mode
4). Operating temp.: −20°c~+70°C
    Storage temp.: −25°c~+75°C
5). Driver : ST7528 Vdd:3V
6). Edge Backlight: White Color, 3~3.3V, Curent: 75~90mA
7). RoHS Compliant

Model Name: LGC128128B		LONGTECH OPTICS CO,. LTD	
GENERAL TOL: ± 0.3			
APPROVALS	DATE	DRAWN NO.	SCALE: 1:1
DWN: YE.GUO.XIANG			
CHK:		SIZE: A4	UNIT: mm / Page: 1-1
APP:			