

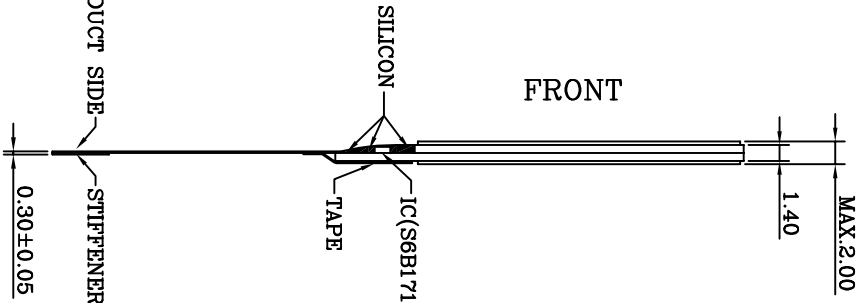



REV	DESCRIPTION:	DATE
1.0		

PIN ASSIGNMENT

1	V4
2	V3
3	V2
4	V1
5	V0
6	C2-
7	C2+
8	C1-
9	C1+
10	C3-
11	C3+
12	VOUT
13	VDD
14	VSS
15	DB7
16	DB6
17	DB5
18	DB4
19	DB3
20	DB2
21	DB1
22	DB0
23	E-RD
24	RW-WR
25	RS
26	RESETB
27	CS1B

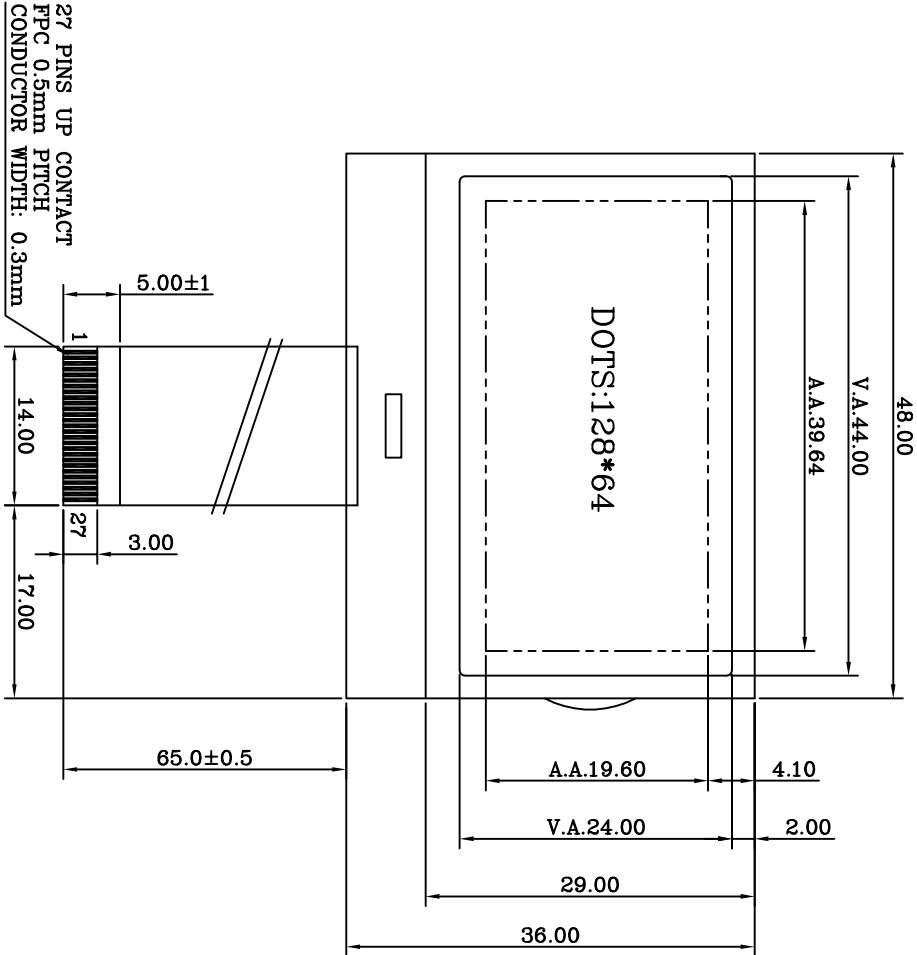

DOTS SCALE:1/10



Specification:

- 1). Driving: Duty:1/65, 1/9 Bais, Vlcd: 9.8V
- 2). Viewing Direction: 12 O'clock
- 3). Display mode: FSTN/Positive/Reflective
- 4). Operating temp.: -20℃~+50℃
- Storage temp.: -20℃~+70℃
- 5). Driver : KS0713 OR S6B1713 Vdd:3.3V
- 6). Unmarked Tolerances: ±0.2mm
- 7). RoHS Compliant

Model Name: LGC12864B		LONGTECH OPTICS CO., LTD.	
GENERAL TOL: ± 0.3	DATE	DRAWN NO.	SCALE: 1:1
APPROVALS			
DWN: YE.GUO XIANG			
CHK:		SIZE: A4	UNIT: mm
APP:			Page: 1-1