

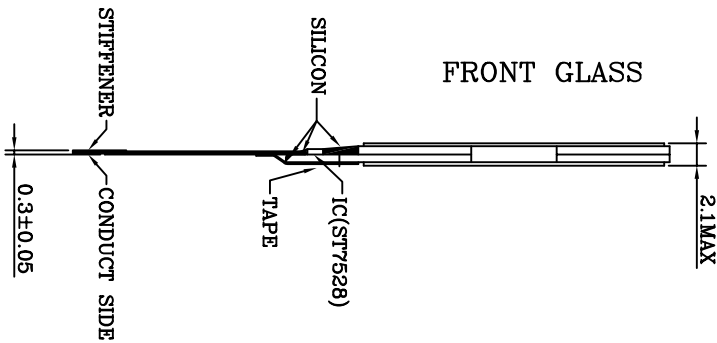


REV	DESCRIPTION:	DATE
1.0	Modify Pinout and Thickness	Y.G.X.

PIN ASSIGNMENT	
1	CSB
2	RST
3	A0
4	RW-WR
5	E-RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	VOOUT
17	V4
18	V3
19	V2
20	V1

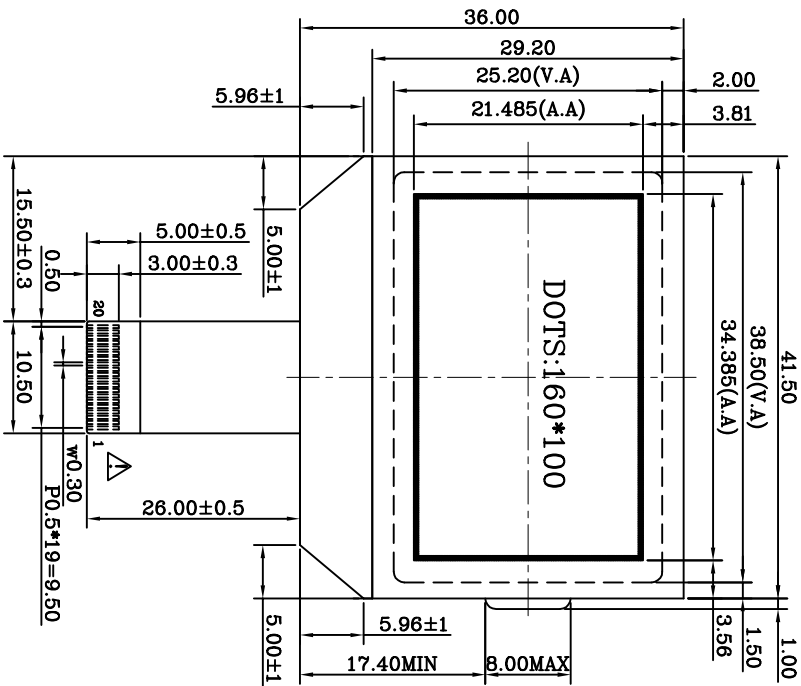

DOTS SCALE:1/20

SEGO SEG159	
COM49	COM99
COM0	COM50

COM & SEG LAYOUT

- Specification:
- 1). Driving: Duty:1/100, 1/11 Bais, Vlcd: 11.5V
 - 2). Viewing Direction: 6 0'clock
 - 3). Display mode: STN/Gray Mode/Positive/Reflective
 - 4). Operating temp.: -10°C~+60°C
 - 5). Storage temp.: -20°C~+70°C
 - 6). Driver : ST7528 Vdd:3.0V
 - 7). Unmarked Tolerances: ±0.2mm
 - 7). RoHS Compliant

Model Name: LGC160100A		LONGTECH OPTICS CO.,LTD.	
GENERAL TOL: ± 0.3	DATE	DRAWN NO.	SCALE: 1:1
APPROVALS			
DWN: YE.GUO.XIANG			
CHK:			
APP:			
SIZE: A4		UNIT: mm	Page: 1-1