


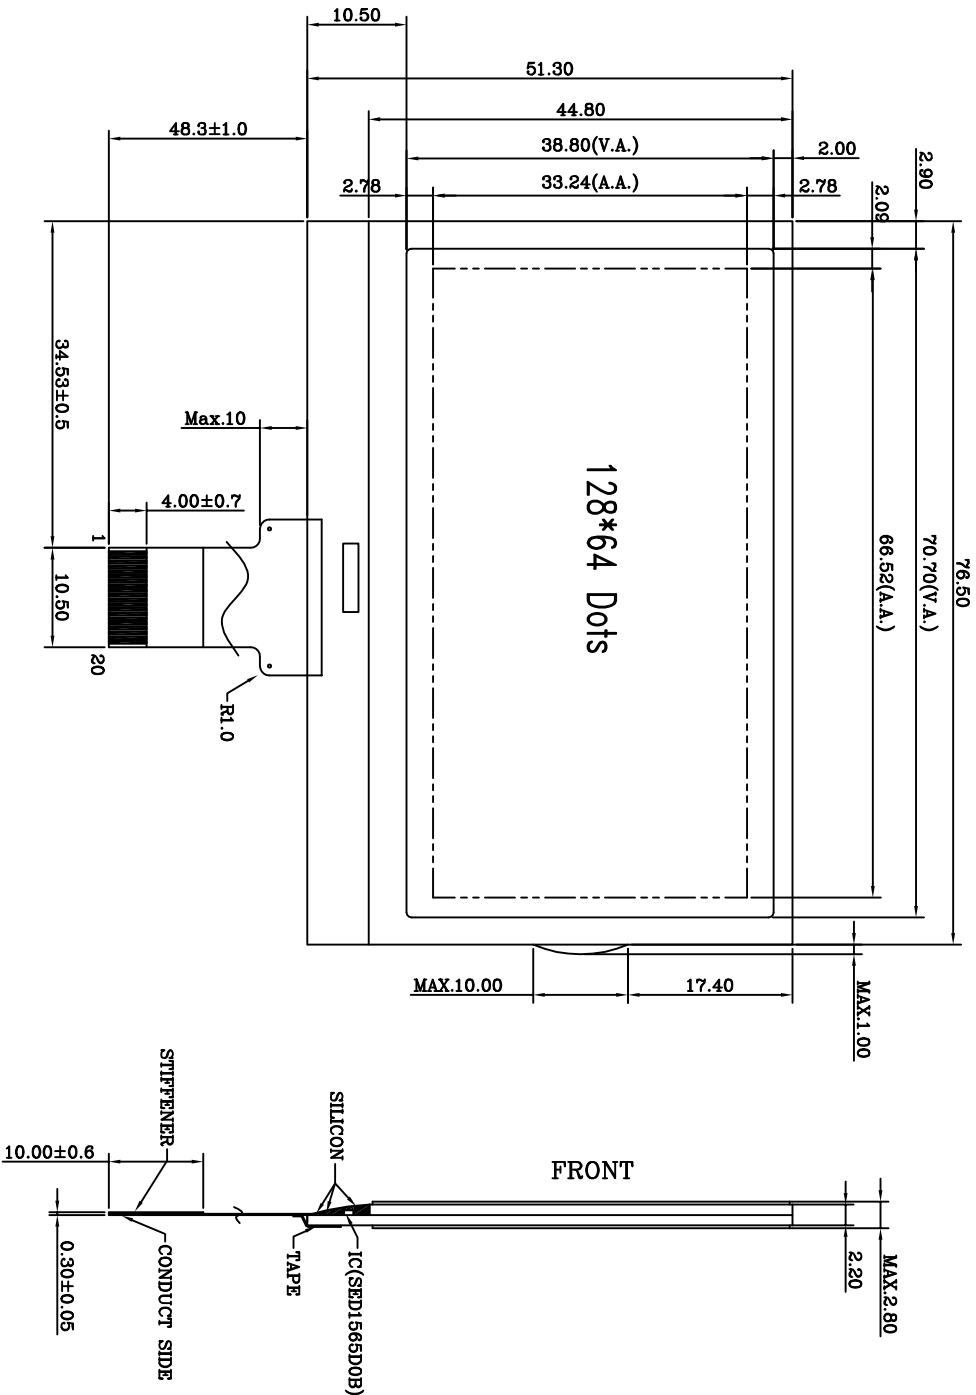


REV	DESCRIPTION:	DATE
1.0		

PIN ASSIGNMENT																			
1	V5																		
2	V4																		
3	V3																		
4	V2																		
5	V1																		
6	NC																		
7	CAP2+																		
8	CAP2-																		
9	CAP1-																		
10	CAP1+																		
11	VOUT																		
12	VSS																		
13	VDD																		
14	D7(SI)																		
15	D6(SCL)																		
16	/RD																		
17	/WR																		
18	A0																		
19	/RES																		
20	/CS1																		



DOTS SCALE:1/10

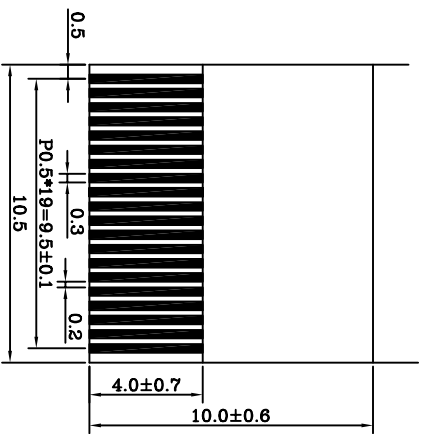

- Specification:
- 1). Driving: Duty:1/65, 1/9 Bais, Vlcd: 10V
 - 2). Viewing Direction: 6 0'clock
 - 3). Display mode: STN(Gray)/Positive/Reflective
 - 4). Operating temp.: -0°c~+50°c
 - Storage temp.: -20°c~+70°c
 - 5). Driver : SED1565D0B VDD:5V
 - 6). Unmarked Tolerances: ±0.2mm
 - 7). RoHS Compliant

Model Name: LGC12864G		LONGTECH OPTICS CO., LTD.	
GENERAL TOL: ± 0.3		DRAWN NO.	SCALE: 1:1
APPROVALS	DATE		
DWN: YE, GUO XIANG			
CHK:		SIZE: A4	UNIT: mm
APP:			Page: 1-1